
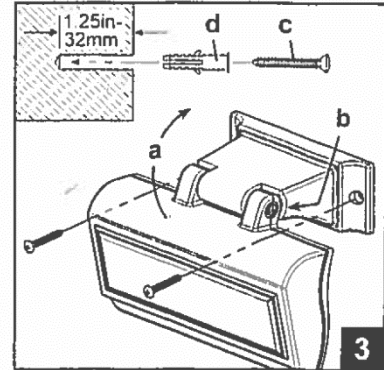
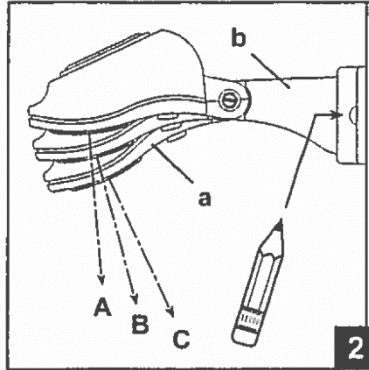


Illuminator Solar Address Lamp Instructions

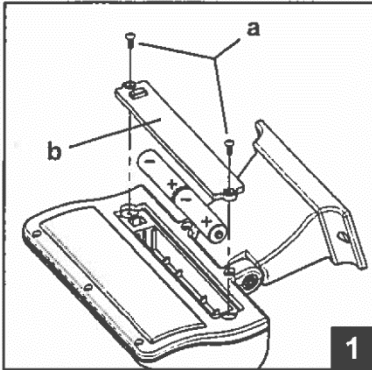

Parts:

Solar Address Lamp, AA Nickel Metal Hydride (NIMH) Batteries, Wood Screws, Plastic Masonry Anchors

Battery Installation (Image 1):

Note: Batteries are not fully charged. Prior to use, the batteries should be charged with a battery charger or by leaving the installed lamp in direct sunlight for 2 days with the switch in the "OFF" position.

1. Remove the 2 screws (a) from the battery cover (b)
2. Insert batteries with correct polarity (+/-) as shown.
3. Replace the battery cover.

Lamp Positioning (Image 2):

1. Choose the lamp position that best suits your use.
 - a. Entryway lighting
 - b. Approximately 12 inches above address
 - c. Approximately 6 inches above address
2. Holding the lamp by the base (b), position the lamp above your address or entryway. Do not tighten the hinge screw; lamp head (a) should be loose and able to rotate freely.
3. Mark the screw locations on the wall through the holes in the base.

To Install (Image 3):

1. Using the hardware provided, attach the base as follows:
 - a. For attachment to wood or siding: Secure using the 2 Screws (c) only. Note: for some wall materials, a 1/16 inch pilot hole may be necessary.
 - b. For attachment to masonry: Drill a 1/4 inch hole into the wall 1-1/4 inch deep using a masonry style drill bit (not provided). Tap in the wall anchors (d) and secure the base using the 2 Screws (c).
2. Rotate the lamp head (a) up until it reaches the desired position and tighten the hinge screw (b).
3. Move the lamp switch to the "ON" position. Lamp will turn on automatically at dusk and with typical charging conditions, will remain lit all night and turn off at dawn.
 - a. Note: Each time the lamp switch is moved to the "ON" position, lamp must be exposed to sunlight or bright light to activate electronic circuit.

Maintenance:

Wipe with a soft damp cloth to clean. After several years, you may find it necessary to replace the batteries. For the best performance, rechargeable NIMH batteries are recommended, however, rechargeable Nickel Cadmium batteries may be used.